


1. Raise hood. Remove and keep front grill hardware. Remove grill.
2. Align hood shield on center of hood. Secure with (2) fasteners. **DO NOT OVERTIGHTEN.**
3. Replace grill with hardware.
4. Close hood. Apply bump-ons to hood behind hood shield.

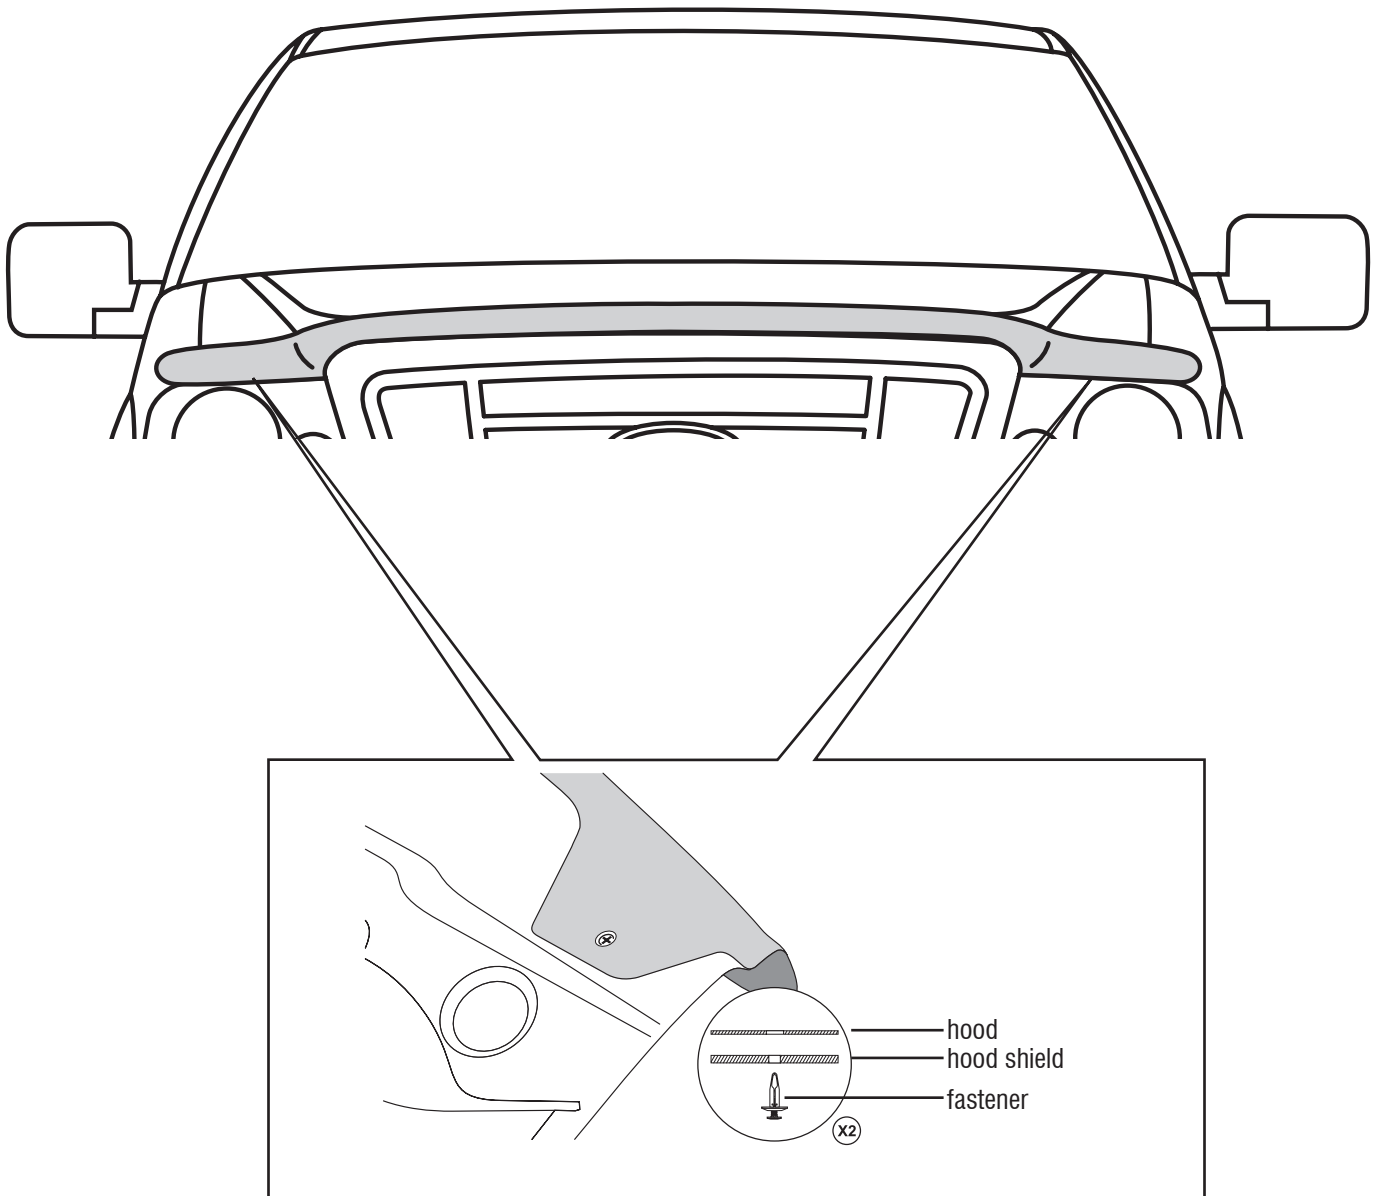

**IMPORTANT:** Before driving, ensure the hood shield is properly secured to vehicle. Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.