
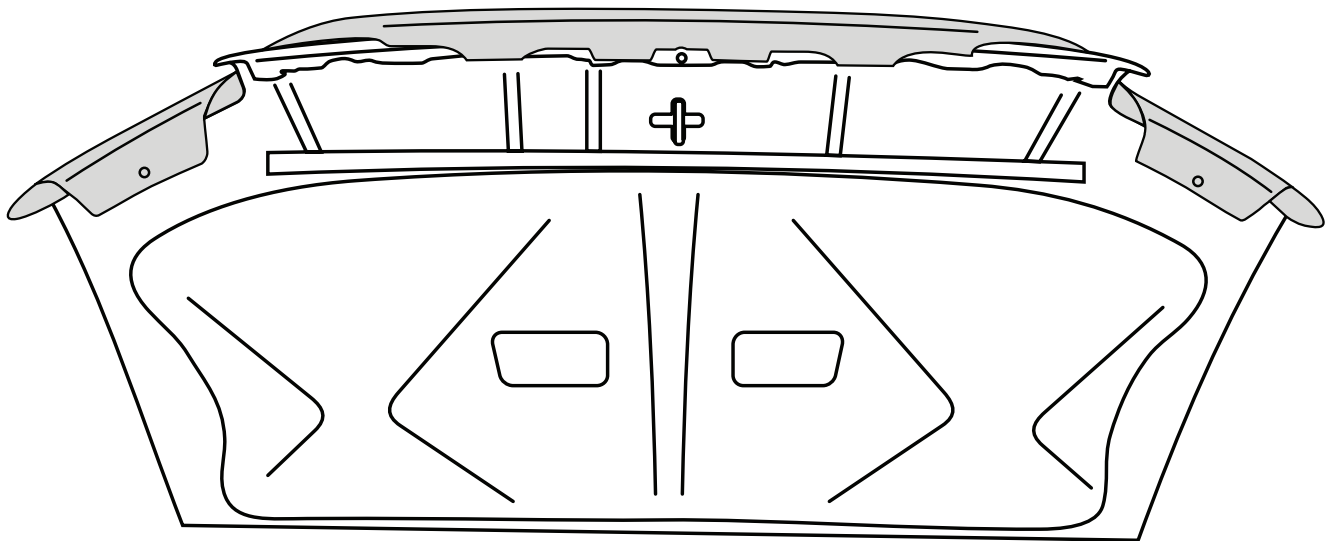
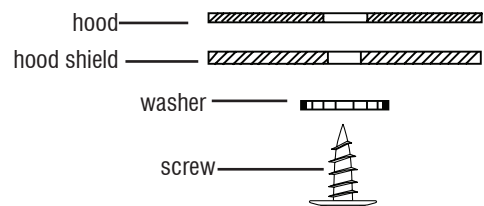


1. Open hood and locate the hood latch behind the grill.
2. Carefully disconnect latch from hood by removing (1) screw with a wrench.
3. Remove (6) nuts that secure grill to hood. Carefully remove grill from hood and set aside.
4. Peel back 2" (5 cm) of tape liner from each end of hood shield.
5. Center hood shield on hood. Press firmly to adhere previously exposed tape to underside of hood.
6. With the hood shield in its final position, remove remaining tape liner.
7. Press firmly along tape flanges to ensure tape had adhered properly to underside of hood.
8. Make sure that the front flange of the hood shield is hanging over the grill opening and reattach grill using previously removed (6) nuts.
9. **OPTIONAL SCREW INSTALL:** Screw the self-tapping screw with washer through the predrilled holes in hood shield and into hood. A power screwdriver is recommended, but once the screwdriver penetrates the inside metal panel use a regular phillips screwdriver the remainder of the way.
10. Install bump ons at pre-cleaned locations on hood surface.

**OPTIONAL SCREW INSTALL**

NOTE: No not overtighten! Use caution not to push too hard on self tapping screw and puncture outer hood surface!

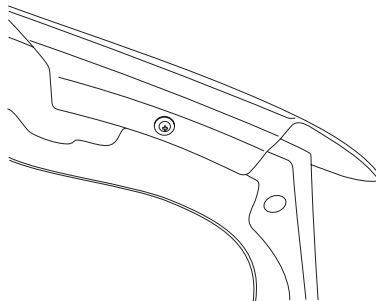

IMPORTANT: Before driving, ensure the hood shield is properly secured to vehicle. Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.